

September 2012

C891 Series Internal Valves

WARNING

Failure to follow these instructions or to properly install and maintain this equipment could result in an explosion, fire and/or chemical contamination causing property damage and personal injury or death.

Fisher® equipment must be installed, operated, and maintained in accordance with federal, state, and local codes and Emerson Process Management Regulator Technologies, Inc. instructions.

Only personnel trained in the proper procedures, codes, standards, and regulations of the applicable industrial service should install and service this equipment.

The internal valve must be closed except during product transfer. A line break downstream of a pump may not actuate the excess flow valve. If any break occurs in the system or if the excess flow valve closes, the system should be shut down immediately.

Introduction

Scope of the Manual

This manual covers instructions for the C891 Series 2 and 3-inch CL300 RF Flange internal valves.

These valves are serialized for the service specified with the order. The valves can be used on other compressed gases, but the user should check with the factory to make sure the valve materials are suitable for the intended service.



P1581

Figure 1. C891 Series

Description

The valves are typically used on the inlets and outlets of transport trucks and on large stationary storage tanks.

Specifications

The Specifications section on the following page shows specifications for C891 Series internal valves.

DOT Internal Self-Closing Stop Valve Requirement—U.S. Department of Transportation (DOT) regulations 49CFR§178.337-8(a)(4) require each liquid or vapor discharge outlet on cargo tanks (except for cargo tanks used to transport chlorine, carbon dioxide, refrigerated liquid, and certain cargo tanks certified prior to January 1, 1995) to be fitted with an internal self-closing stop valve. Fisher's "C" Series internal valves comply with the internal self-closing stop valve requirement under the DOT regulations.



C891 Series

Specifications

Body Size and End Connection Style

Inlet: 2 or 3-inch CL300 RF Flanged

Outlet: 2 or 3-inch CL300 RF Flanged

Number of Outlets

C891 Series: 2 (side and straight through)

Maximum Allowable Inlet Pressure

500 psig / 34.5 bar WOG

Excess Flow Springs

2-Inch / DN 50 Size: 105, 150, and 250 GPM / 397, 567, and 946 l/min propane

3-Inch / DN 80 Size: 160, 265, 375, and 400 GPM / 606, 833, 1003, and 1514 l/min propane

Temperature Capabilities

-20 to 150°F / -29 to 66°C

Approximate Weights

2-Inch / DN 50: 20 pounds / 9 kg

3-Inch / DN 80: 32 pounds / 15 kg

Construction Materials

Stainless Steel: Lever, Cam, Disc Holder, Springs, Hexagon Head Cap Screws, Cotter Pin, Stub Shaft, Stem, Washers, Drive Screw, Plug Holder, Stop Tube, Body, Gland, Web, Pins, Screws, Bolts, Nut Washer, Spring Seat, Disc Retainer, Disc Holder, and Retainer

Plated Steel: Nameplate, Drive Pin


Polyurethane: Rod Wiper

Polytetrafluoroethylene (PTFE) or Filled PTFE: Gland Packing, Liner Brushing, Washer, Wear Plug

Nitrile (NBR) (Standard Construction): Disc and O-Rings

Other Disc and O-Ring Trim Material Available from Factory: PTFE, Neoprene (CR), Fluorocarbon (FKM), and Kalrez®

Kalrez® is a mark owned by E.I. du Pont de Nemours and Co.

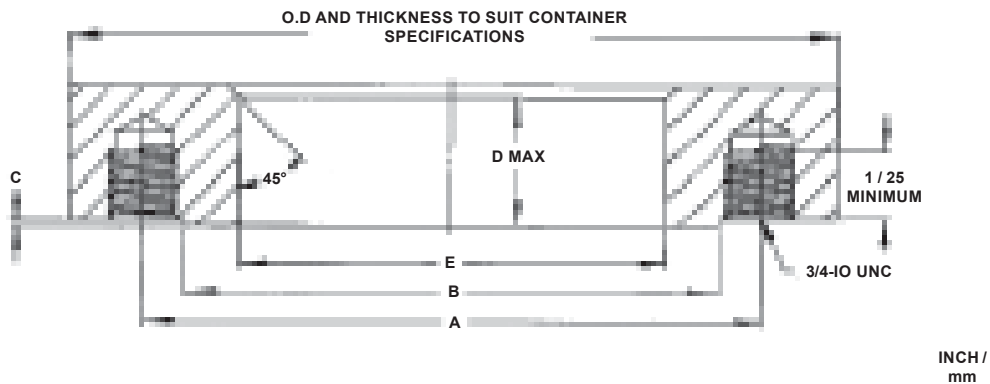

TANK CONNECTION FLANGES															
CL300 RF ANSI RF FLANGE	A-BOLTING					B RF		C RF		D		E		MATING FLANGE O.D.	
	DBC		NO.	Size		Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
	Inches	mm		Inches	mm										
2-inch / DN 50	5.0	127	8	5/8	16	3.62	92			1.45	37	2.46	62	6.50	165
3-inch / DN 80	6.62	168	8	3/4	19	5.75	146	0.06	1.5	1.50	38	4.62	117	8.25	210

Figure 2. Tank Connection Flanges

Installation

Note

Installer must furnish 8 stud bolts, 8 flange nuts, and spiral wound gaskets as these parts are not supplied with the internal valves.

Coat both sides of the spiral wound gaskets with Dow Corning #111 silicone grease or equivalent. An appropriately sized tank flange, see Figure 2, must be installed in the tank. The internal valve can then be installed in the tank and outlet piping attached to the internal valve.

Keep piping from the valve outlet to the pump full size and as short as possible with a minimum number of bends. Reduction in pipe size to suit smaller pump inlets should be made as close to the pump as possible using forged reducers (swage nipples) or venturi tapers rather than bushings. This assures minimum flow resistance and efficient pump operation.

The valves have a break off section below the inlet flange which is intended to permit the lower valve body to shear off in an accident, leaving the valve seat in the tank. **The break off section is designed for container installations and will probably not provide shear protection if the valve is installed in a pipeline.**

A hydrostatic relief valve does not need to be installed adjacent to the valve since the internal valve relieves excessive line pressure into the tank.

Selectively Filling Manifolded Tanks

Fisher® internal valves provide positive shutoff only in one direction, from out of the tank to downstream of the valve. The internal valves are designed to allow gas to flow into a tank when the downstream line pressure exceeds tank pressure. If you want to selectively fill one or more of the other tanks in a tank manifold system, you must place a positive shutoff valve downstream of the internal valve, otherwise, all tanks will be filled at the same time and at about the same rate.

Actuators

The remote operating control system for the valve is extremely important, and it must be installed to conform with the applicable codes. DOT MC331, for example, most generally applies for trucks.

Fisher offers both cable controls and pneumatic actuator systems to operate the C891 Series internal valves. It may also be possible to use cable controls from other manufacturers or to fabricate a linkage mechanism.

Any control system requires thermal protection (fuse links) at the valve, at the remote control point and, if necessary, near the hose connections. The instruction manuals for Emerson Process Management Regulator Technologies, Inc., actuator systems show how to install the fuse links.

Installation instructions on Fisher Types P650, P163A, and P164A cable controls, are in Form MCK-1083. Pneumatic actuator installation is covered in Form MCK-2159. Type P340 latch/remote release instructions are on Form MCK-2048.

The operating linkage must allow the operating lever to move from the fully closed position to within 2° of the fully open position. The linkage should not apply strong force to the lever past the fully open position or the valve could be damaged.

Warranty Note

The use of non-Fisher actuators will void internal valve warranty and may result in leakage of the gland packing caused by premature wear. In addition to premature wear, the use of non-Fisher actuators may result in lower than expected flow rates and possible leakage across the valve seats.

CAUTION

The internal valve's closing spring is not designed to overcome drag in the control linkage in order to close the valve. Depending upon the control system used, an external spring (such as Fisher drawing number 1K4434) or positive closing linkage may be needed. Be sure the control system is installed to prevent binding that could cause the valve to stick in the open position.

Excess Flow Operation

The internal valve contains an excess flow function, or "integral excess flow valve", that will close when

C891 Series

the flow exceeds the flow rating established by Fisher®. Fisher's integral excess flow valve installed on a bobtail truck or transport can provide protection against the discharge of hazardous materials during an unloading operation of a bobtail truck or transport in the event that a pump or piping attached directly to the internal valve is sheared off before the first valve, pump, or fitting downstream of the internal valve, provided that the cargo tank pressure produces a flow rate greater than the valve's excess flow rating.

Likewise, if the internal valve is installed on a stationary tank or in the related downstream piping system, the integral excess flow valve can provide protection against an unintentional release of hazardous materials in the event that a pump or piping attached directly to the internal valve is sheared off before the first valve, pump, or fitting downstream of the internal valve, provided that the flow of product through the internal valve reaches the rated flow specified by Fisher.



EXPLOSION HAZARD

Restrictions incorporated in the discharge system of a bobtail truck or transport or of a stationary tank (due to pumps, pipe and hose length and dimensions, branching, elbows, reductions in pipe diameter, or a number of other in-line valves or fittings), low operating pressure as a result of ambient temperature, or a partially closed valve downstream from the integral excess flow valve, can restrict the rate of flow through the internal valve below the level necessary to actuate the integral excess flow valve. Therefore, DO NOT USE the excess flow function of the internal valve for the purpose of providing protection against the discharge of hazardous materials in the event of a rupture of hose or piping at a point in the discharge system downstream from the first valve, pump, or fitting downstream of the internal valve.

The internal valve is designed with an internal bleed feature for equalization of pressure. After the integral excess flow valve closes, the leakage through the bleed must be controlled or a hazard can be created. For this reason the operator must be familiar with the closure controls for the internal valve and must close the internal valve immediately after the integral excess flow valve closes.

Failure to follow this warning could result in serious personal injury or property damage from a fire or explosion.

DOT Passive Shutdown Equipment Requirement

—DOT regulations 49CFR§173.315(n)(2) require certain cargo tanks transporting propane, anhydrous ammonia and other liquefied compressed gases to be equipped with passive emergency discharge control equipment that will automatically shut off the flow of product without human intervention within 20 seconds of an unintentional release caused by complete separation of a delivery hose. The design for each passive shutdown system must be certified by a Design Certifying Engineer (DCE) and all components of the discharge system that are integral to the design must be included in the DCE certification. The DCE certification must consider any specifications of the original component manufacturer.

In the case of downstream ruptures in hose or piping, a variety of operating conditions routinely encountered during an unloading operation restrict the rate of flow through the integral excess flow valve and make such a valve unsuitable to serve as the means of passive shutdown required under 49CFR§173.315(n)(2). Such variables include restrictions incorporated in the discharge system (due to pumps, pipe and hose length and dimensions, branching, elbows, reductions in pipe diameter, or a number of other in-line valves or fittings), low operating pressure as a result of ambient temperature, or a partially closed valve downstream from the excess flow valve. Due to the variety of conditions, in the case of a hose separation, that can restrict the rate of flow below the level necessary to activate the excess flow valve, the integral excess flow function of Fisher's "C" Series internal valves or "F" Series excess flow valves cannot be used to satisfy the passive shutdown equipment requirement under in 49CFR§173.315(n)(2). Also, a Design Certifying Engineer cannot include the integral excess flow valve of a Fisher "C" Series internal valve or "F" Series excess flow valve as a component of the discharge system in any DCE certification under 49CFR§173.315(n)(2).



EXPLOSION HAZARD

DO NOT USE the excess flow function incorporated into Fisher "C" Series internal valves or "F" Series excess flow valves to satisfy the passive shutdown equipment requirement in 49CFR§173.315(n)(2). DO NOT include the excess flow function incorporated

into Fisher “C” Series internal valves or “F” Series excess flow valves in a DCE certification under 49CFR§173.315(n)(2). The cargo tank manufacturer must install some other equipment that satisfies the requirement for passive shutdown capability under 49CFR§173.315(n)(2).

Failure to follow this warning could result in serious personal injury or property damage from a fire or explosion in the event of an unintentional release of product during an unloading operation.

Operation

Since the C891 Series will not open unless the downstream pressure can build-up to equal the inlet pressure, an operating sequence that assures equalization is important.

Follow these points:

1. C891 Series internal valves on bobtails and transports should never be open when the truck is in motion. If the control system is not interlocked to prevent this, the operator is responsible to see that the valves are closed.
2. Always open the internal valve before opening any other valves in the line or starting the pump.
3. Move the lever to the half-open position (Figure 3, view #2) to equalize pressure. When the main poppet clicks open, move the operating lever fully open.
4. Open other line valves slowly to avoid sudden surges which could slug the excess flow valve shut.
5. If the excess flow valve does close, stop the pump and close the nearest downstream valve. Move the internal valve’s operating lever back to the rapid equalizing position and wait for the valve to click open. Then move the operating lever fully open and slowly open the downstream valve.
6. All valves should be completely open when pumping. (Throttling type valves could prevent the excess flow valve from closing when required.)
7. The operator must always be aware of where the remote closure controls are located and know how to operate the controls if an emergency requires valve closure. When pumping is finished, make a habit of closing the internal valve from the

remote closure point, thus checking to see that the control actually is capable of closing the valve.

8. The valve should be open when back filling through the valve to fill the tank.

Troubleshooting

Internal Valve Will Not Open—This could be due to leakage downstream, engaging the pump too soon or from excessive wear in the internal valve. If excessive volume is in the downstream system, a longer time is required to equalize the pressures (tank and downstream) before the pump can be engaged. To determine if the valve pilot seat is opening, install a gauge downstream of the valve, operate the valve actuator; if pressure does not build up to the tank pressure, the valve pilot seat is not open. This test should be done with pump off. If the pilot is not opening, it may be plugged with dirt or some internal part may be broken. If by operating the lever manually it can be rotated past the fully open position, there is something wrong internally and the valve must be disassembled.

Premature Valve Closure—This can be caused from engaging the pump too soon, by an underrated excess flow valve spring, or by an improperly connected internal valve operating lever which does not fully open the valve. The trouble could also be from a valve that has its inlet port obstructed or from sudden line surges. In order to check the valve opening travel, operate the lever manually to the full travel, wait until valve opens then engage the pump. If the excess flow closes, the points mentioned above should be investigated.

Internal Valve Will Not Close—The stub shaft could be binding or the stem could be bent in the valve. Before disassembling the valve, check the actuator mechanism to see that it operates freely by disconnecting it from the valve lever and cycling it several times. Also, operate the valve lever manually. If it sticks in the open position, the packing and bushings should be replaced. This should free the operating mechanism if the valve has not been damaged internally. Refer to the “Maintenance” section.

Low Flow Capacity—This could be caused by too small an internal valve, too small or long downstream piping, plugged screens, some other restriction in the downstream system, or by the bypass valve sticking in the open position. The bypass valve could also be set too low and be opening prematurely.

C891 Series

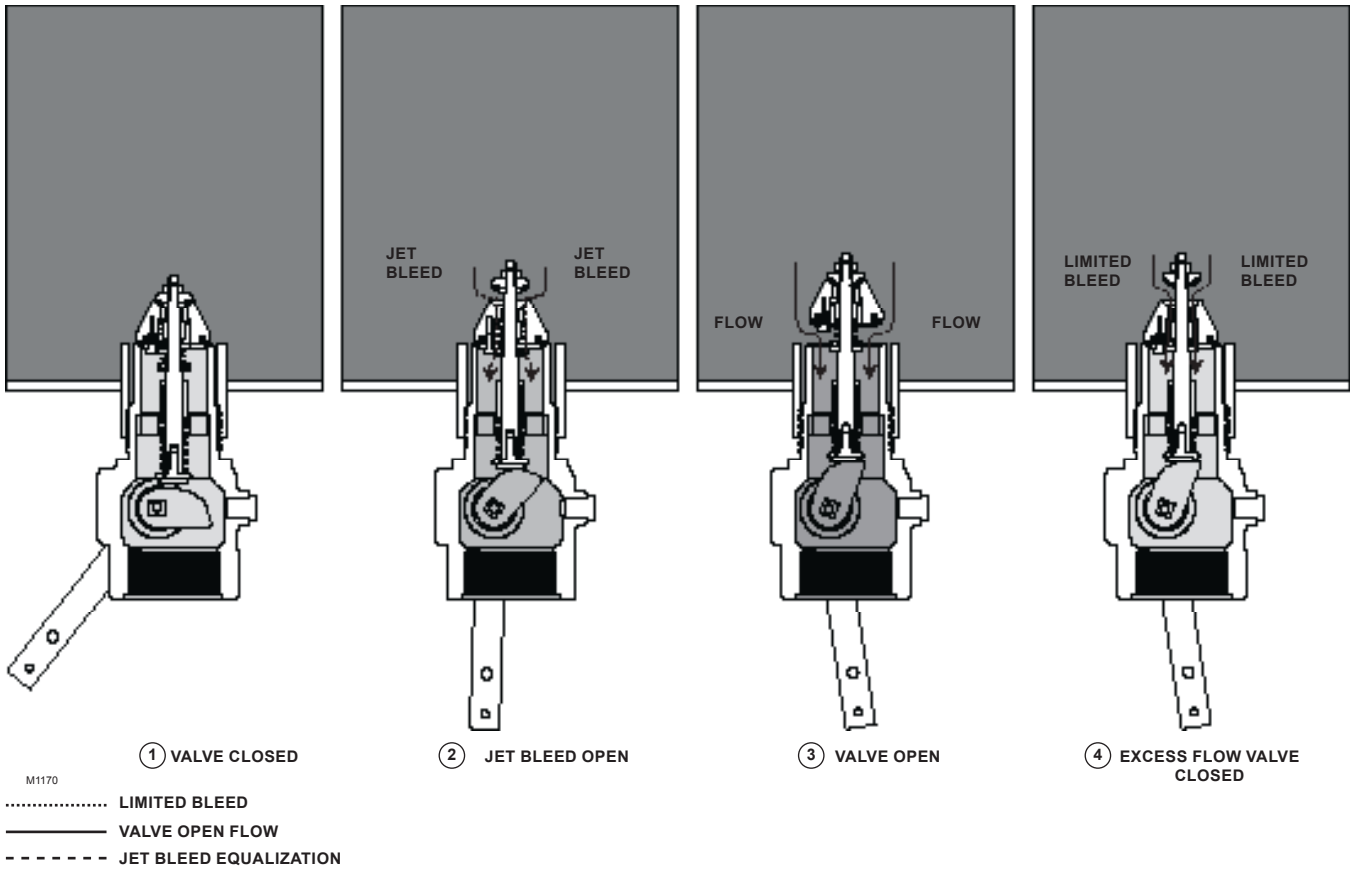


Figure 3. Operational Schematic

Principle of Operation

Refer to the schematic drawing, Figure 3. In view #1, the valve is held closed by both tank pressure and the valve's closing spring. There is no leakage past the resilient seats in the poppet to the valve outlet.

The valve is opened by moving the operating lever to approximately midpoint in its 70° travel (view #2). This allows the cam to place the rapid equalization portion of the valve stem in the pilot opening, permitting a larger amount of product to bleed downstream than if the operating lever were moved to the full open position.

When tank and downstream pressure are nearly equal after a few seconds, the excess flow spring pushes open the main poppet (view #3) and the operating lever can be moved to the full open position.

If tank pressure is greater than the valve's outlet pressure, the main poppet will remain in the closed position. If valve outlet piping is closed off by other

valves, however, product bleeding through the pilot will increase until it nearly equals tank pressure and the main poppet opens.

Note

The main poppet will not open if valve outlet piping is not closed off so that the outlet pressure can approach tank pressure.

Once the main poppet opens, a flow greater than the valve's excess flow spring rating or a sufficient surge in flow forces the main poppet closed against the excess flow spring (view #4). The pilot valve allows a small amount of product to bleed, but much less than view #2 where the rapid equalization portion of the stem is placed in the pilot opening. When the operating lever is moved to the closed position, the valve closes completely and seals tightly (view #1).

Maintenance

CAUTION

Do not use these internal valves if they leak, fail to work properly or have been damaged or have missing parts. Prompt repairs should be made by a properly trained service person. Continued use without repair can create a hazardous or injurious situation.

A simple preventative maintenance program for the valve and its controls will eliminate a lot of potential problems.

Fisher recommends these steps be conducted once a month. Also refer to the Department of Transportation (DOT) CFR 49 Sections 180.416 and 180 Appendix A and B which specify monthly maintenance and inspections tests for cargo tank service internal valves and their actuation controls.

1. Inspect the operating lever to see that it operates freely and that there is no leakage around the retainer nut. If there is sticking or leakage, replace the packing and bushings. Refer to Replacing Packing.
2. Check for tight closure of the seat discs. Any detected leakage, which is normally caused by disc wear or dirt, scale or debris embedded in the disc, requires that the internal valve be removed from service and repaired. Repair most often requires the replacement of valve discs. To check for leakage:
 - a. Close the internal valve and exhaust downstream pressure. Close the first valve downstream from the internal valve, and note any pressure buildup, using a pressure gauge, between the closed valve and the internal valve. If piping is cold allow it to warm to ambient temperature.
 - b. Refer to CFR 49 Section 180 Appendix B for Meter Creep Test Methods.
3. All operating controls should be inspected and cleaned and oiled. The controls should be checked to see that they fully open—but not over-travel—the internal valve operating lever and operate freely to close the valve.
4. Standard construction internal valves must be removed if the container is to be steam cleaned. Heat can damage the valve's seats and seals.
5. Standard construction internal valves are not designed for water service. Immediately after a container is hydrostatically tested, remove all water and allow the container to thoroughly dry out.

Disassembly

WARNING

Tank pressure must be released before removing the valve from the container. Failure to do so could result in personal injury.

Numbers in parenthesis refer to key numbers in Figures 4 and 6.

To Replace Packing

1. The packing (keys 15F, G, and H) can be replaced with product in the tank by closing the operating lever (key 18) and blowing down the downstream pressure in the system.
2. Remove the three cap screws (key 17) holding the bonnet assembly to the body.
3. Rotate the entire bonnet assembly slightly to remove it from the body.
4. Unscrew the cap screw (key 15R) from the stub shaft (key 15J), and remove the operating lever by taking out the cotter pin (key 19).
5. Unscrew the retaining nut (key 15M) from the bonnet. Pushing on the stub shaft (key 15J) will expose the bonnet parts including the packing.
6. Besides the packing, the liner bushings (keys 15B and 15K) should be replaced.
7. Reassemble in reverse order. Replace cap screw (key 15R) using 30 to 35 inch-pounds torque.
8. Make sure the operating lever can move freely after the new parts are installed. Conduct a leak test under pressure with a soap solution.

To Replace Seat Discs

1. Remove the valve from the tank.
2. Remove the cotter pin (key 14, Figure 6) and unscrew the hex nut (key 13).
3. Remove both disc holders (keys 6 and 12) from the stem (key 2).
4. Unscrew the three screws (key 9) holding the disc retainer (key 8) to replace the main seat disc.
5. Examine both seat discs (keys 7 and 11) and replace if necessary.
6. If the excess flow spring (key 3) is changed, replace the nameplate or stamp the body with the new type number.
7. Always replace the sealing washer (key 23).
8. Reassemble in reverse order using 15 to 20 foot-pounds torque to install the disc retainer (key 8). Apply Loctite No. 242 or equivalent on the stem threads before installing the hex nut (key 13).

CAUTION

Failure to properly center the disc retainer to the disc holder may result in improper function of the valve.



Figure 5. Use Tool Provided or Spring Seat (key 4) and Stem Assembly (key 2) to Align Disc Retainer (key 8)

†Recommended spare part for 2-inch body size
*Recommended spare part for 3-inch body size

Important

During replacement of the seat disc, use P/N GE45079X012 provided to center the disc retainer to the disc holder (See Figure 5). Line up holes and insert screws. Keep the alignment tool inserted until all of the screws are tightened to specification.

Alternately, the stem assembly (key 2) and spring seat (key 4) may be used as shown in Figure 5 to perform this alignment. After assembly, check to make sure there is no interference of the spring seat and disc retainer when the valve is in the excess flow position.

Parts Ordering

Important

Use only genuine Fisher® replacement parts. Components that are not supplied by Emerson Process Management Regulator Technologies, Inc. should not, under any circumstances, be used in any Fisher valve, because they will void your warranty, might adversely affect the performance of the valve, and could give rise to personal injury and property damage.

When corresponding about this equipment, always reference the equipment type number found on the nameplate.

When ordering replacement parts, reference the complete 11-character part number for each needed part.

Parts List

Type C891 Internal Valve

Key	Description	Part Number
	Repair Kits	
	2-inch, NPT	RC47016T012
	3-inch, NPT	RC47024T012
1	Body, Stainless steel	
	2-inch	T80277T0012
	3-inch	T80279T0012
2	Stem Assembly	
	†2-inch, Steel/SST	GE41520T012
	*3-inch, Steel	GE41522T012
2A	Stem, Stainless steel	
	2-inch	GE35309T012
	3-inch	GE35311T012

C891 Series

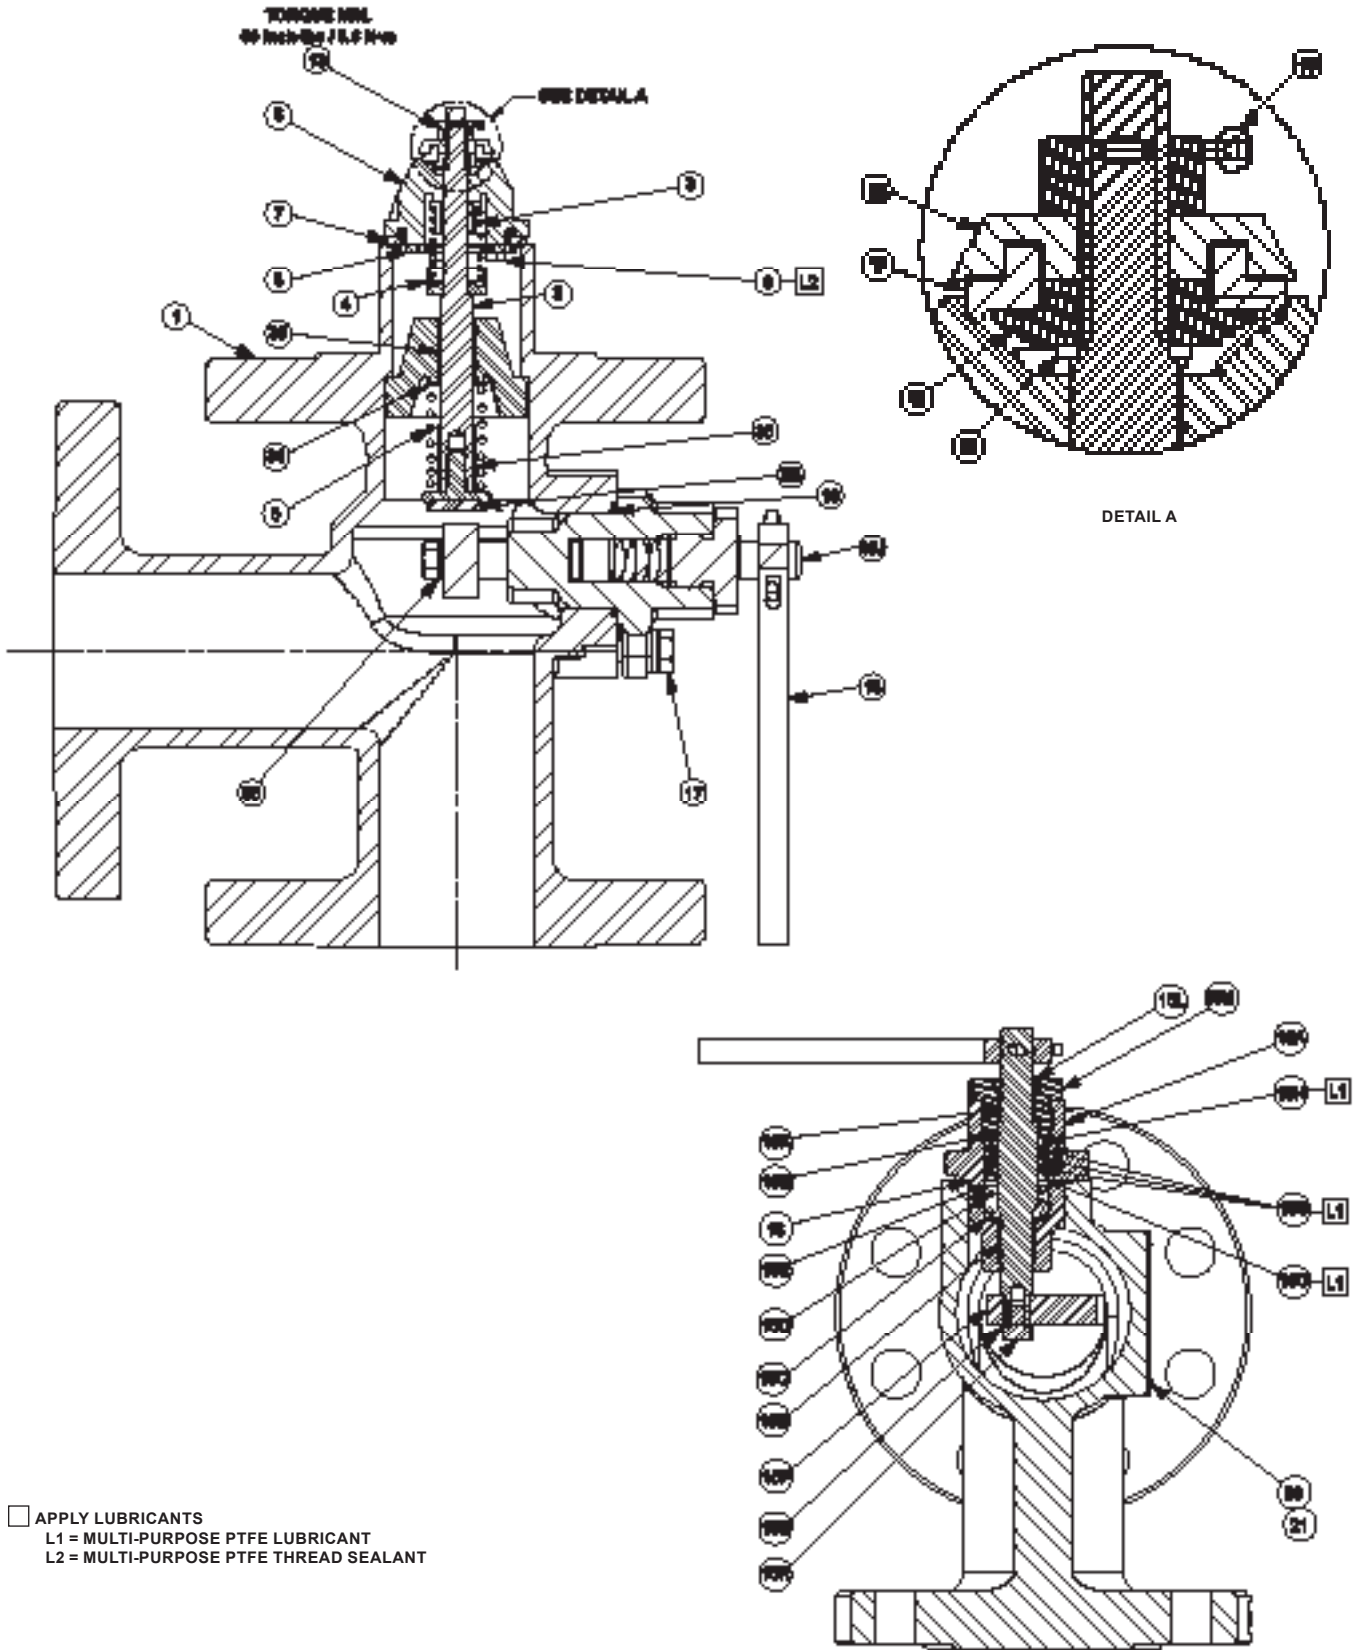


Figure 6. Type C891 Assemblies

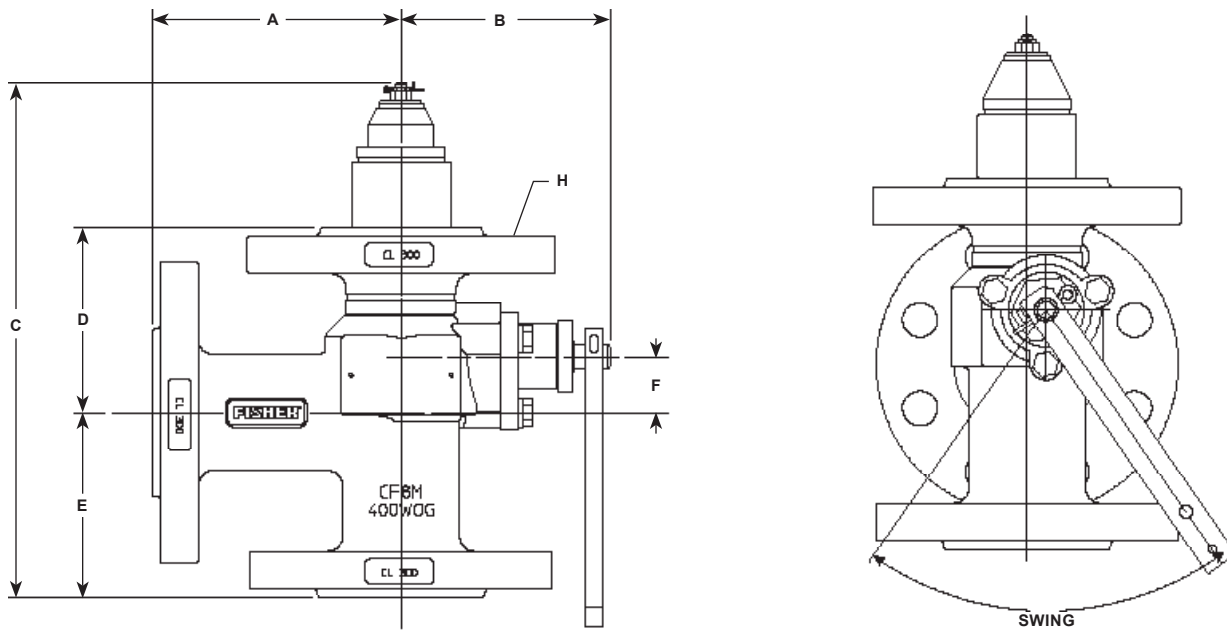


Figure 7. Dimensions

Table 1. Dimensions

TYPE NUMBER	FLANGED VALVES														
	A		B		C		D		E		F		G		H
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches/mm
C891-16	5.52	140	4.41	112	10.94	278	3.88	98	3.88	98	1.18	30	0.42	11	2 / 51 CL300 RF
C891-24	6.75	171	5.13	130	12.50	317	4.63	118	4.63	118	1.38	35			3 / 76 CL300 RF

Key	Description	Part Number	Key	Description	Part Number
2B	Follower Assembly, Stainless steel, and PTFE	T1188000A2	7	Main Disc	
2C	Groove Pin, Stainless steel (not shown)	1J1560T0012		†2-inch	
3	Excess Flow Spring, Stainless steel (not shown)			Nitrile (NBR)	T1154003202
	2-inch			PTFE	T1214006242
	105 GPM, Green	GE42498X012		Fluorocarbon (FKM)	T12533T0012
	150 GPM, Yellow	T1153537022		Neoprene (CR)	T12879T0012
	250 GPM, Pink	T1200537022		Kalrez®	T12877T0012
	3-inch			Ethylene-Propylene (EPMD)	T13474T0012
	160 GPM, Blue	GE42499X012		*3-inch	
	265 GPM, Black	GE42500X012		Nitrile (NBR)	T1177403032
	375 GPM, Yellow	GE42851X012		PTFE	T1217306242
	460 GPM, Red	GE42501X012		Fluorocarbon (FKM)	T12535T0012
4	Spring Seat, Stainless steel			Neoprene (CR)	T12914T0012
	2-inch	GE35317T012		Ethylene-Propylene (EPMD)	T13476T0012
	3-inch	GE35318T012		Kalrez®	T12921T0012
5	Closing Spring, Stainless steel	T1153737022	8	Disc Retainer, Stainless steel	
6	Main Disc Holder, Stainless steel			2-inch	GE35313T012
	2-inch	GE35315T012		3-inch	GE35314T012
	3-inch	GE35316T012			

†Recommended spare part for 2-inch body size
 *Recommended spare part for 3-inch body size
 Kalrez® is a mark owned by E.I. du Pont de Nemours and Co.

C891 Series

Key	Description	Part Number	Key	Description	Part Number
9	Screw, Stainless steel (6 required)	13B3513X022	15S	Washer, Stainless steel	T1220736152
10	Bleed Disc Seat, Stainless steel	ERAA00325A0	16†*	O-Ring	
11†*	Bleed Disc			Nitrile (NBR)	T1155706562
	Nitrile (NBR)	ERAA00328A0		PTFE	T1214206522
	PTFE	ERAA00328A1		Fluorocarbon (FKM)	T12577T0012
	Fluorocarbon (FKM)	ERAA00328A2		Kalrez®	T1214206522
	Ethylene-Propylene (EPMD)	ERAA02202A0		Neoprene (CR)	T1214206522
	Neoprene (CR)	ERAA00328A		Ethylene-Propylene (EPMD)	T13477T0012
	Kalrez®	ERAA00328A3	17	Cap Screw, Steel (3 required)	T12499T0012
12	Bleed Disc Retainer, Stainless steel	ERAA00324A0	18	Lever	
13†*	Nut, Carbon-plated steel	GE04678T012		Standard	T1155919312
14†*	Cotter Pin, Stainless steel	T1241338992		Stainless steel	T11559T0022
15A	Gland, Stainless steel	T2052033092	19†*	Cotter Pin (not shown)	
15B†*	Liner Bushing, PTFE	T1154506992		Standard	1H837128982
15C†*	Washer, Stainless steel	T1220236152		Stainless steel	1H8371T0022
15D	Spring, Stainless steel	T1154737022	20	Nameplate (not shown)	-----
15E†*	Washer, Stainless steel (2 required)	T1220336152	21	Drive Screw (2 required) (not shown)	1A368228982
15F†*	Male Adaptor, PTFE	T1154901012	23†*	Washer, Zinc	T1188228982
15G†*	Packing Ring, PTFE (3 required)	T1155001012	24	Instruction Tag	-----
15H†*	Female Adaptor, PTFE	1H941601012	30	Fusible Link	1J157443992
15J	Stub Shaft, Stainless steel		33	Travel Stop, Stainless steel	T1240838072
	2-inch	T2037835072	34	Washer, Stainless steel	T1221236152
	3-inch	T2043135072	35†*	Bushing, PTFE	T1221306992
15K†*	Liner Bushing, PTFE	T1155106992	36	Guide, Stainless steel	
15L†*	Rod Wiper, Polyurethane	T1155206992		2-inch	T12918T0032
15M	Bonnet, Steel	T1155324102		3-inch	T12511T0022
15P	Cam, Stainless steel	T1220535072	55	Lock Washer, Stainless steel (3 required)	1C2257K0012
15R	Cap Screw, steel	T12206T0022			

†Recommended spare part for 2-inch body size

*Recommended spare part for 3-inch body size

Kalrez® is a mark owned by E.I. du Pont de Nemours and Co.

LP-Gas Equipment

Emerson Process Management Regulator Technologies, Inc.

USA - Headquarters
McKinney, Texas 75069-1872 USA
Telephone: 1 (800) 558-5853
Telephone: 1 (972) 548-3574

For further information visit www.fisherregulators.com

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their prospective owners. Fisher is a mark owned by Fisher Controls, International LLC., a business of Emerson Process Management.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Process Management Regulator Technologies, Inc., does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Emerson Process Management Regulator Technologies, Inc. product remains solely with the purchaser.